


Anruike/安瑞科 SMD POWER INDUCTORS CDRH129 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

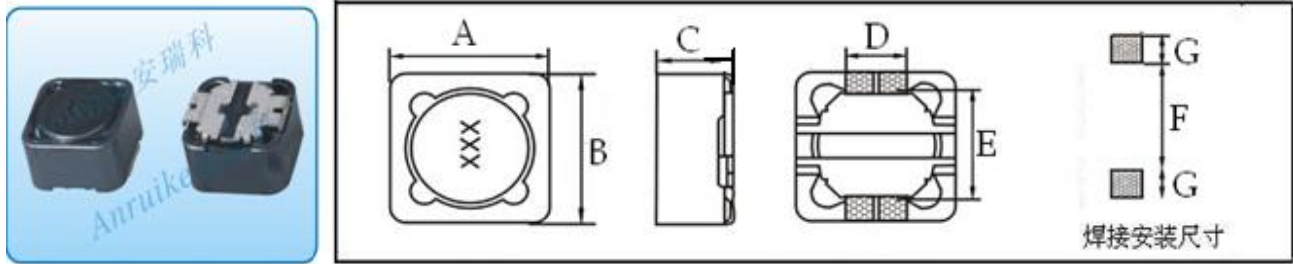

产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH129	12.0	12.0	10.0	5.0	7.6	7.0	2.9	300PCS/R

电气性能 Electrical properties

Anruike/安瑞科 www.anruike.com Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH129-100M	10	±20	100KHz/0.25V	0.018	9.0
CDRH129-120M	12	±20	100KHz/0.25V	0.025	7.8
CDRH129-150M	15	±20	100KHz/0.25V	0.026	5.84
CDRH129-220M	22	±20	100KHz/0.25V	0.034	5.8
CDRH129-330M	33	±20	100KHz/0.25V	0.045	5.5
CDRH129-470M	47	±20	100KHz/0.25V	0.055	5.0
CDRH129-560M	56	±20	100KHz/0.25V	0.068	4.0
CDRH129-680M	68	±20	100KHz/0.25V	0.08	3.5
CDRH129-820M	82	±20	100KHz/0.25V	0.099	3.2
CDRH129-101M	100	±20	100KHz/0.25V	0.12	2.9
CDRH129-121M	120	±20	100KHz/0.25V	0.14	3.0
CDRH129-151M	150	±20	100KHz/0.25V	0.18	2.8
CDRH129-181M	180	±20	100KHz/0.25V	0.19	2.5
CDRH129-221M	220	±20	100KHz/0.25V	0.24	2.3
CDRH129-331M	330	±20	100KHz/0.25V	0.37	1.8
CDRH129-471M	470	±20	100KHz/0.25V	0.45	1.65
CDRH129-561M	560	±20	100KHz/0.25V	0.60	1.40
CDRH129-681M	680	±20	100KHz/0.25V	0.73	1.24
CDRH129-821M	820	±20	100KHz/0.25V	0.87	1.15
CDRH129-102M	1000	±20	100KHz/0.25V	1.0	0.9
CDRH129-122M	1200	±20	100KHz/0.25V	1.52	0.75
CDRH129-152M	1500	±20	100KHz/0.25V	2.0	0.70
CDRH129-182M	1800	±20	100KHz/0.25V	2.18	0.48
CDRH129-222M	2200	±20	100KHz/0.25V	2.58	0.43

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ: 1193940818