


# Anruike/安瑞科 SMD POWER INDUCTORS CDRH62 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

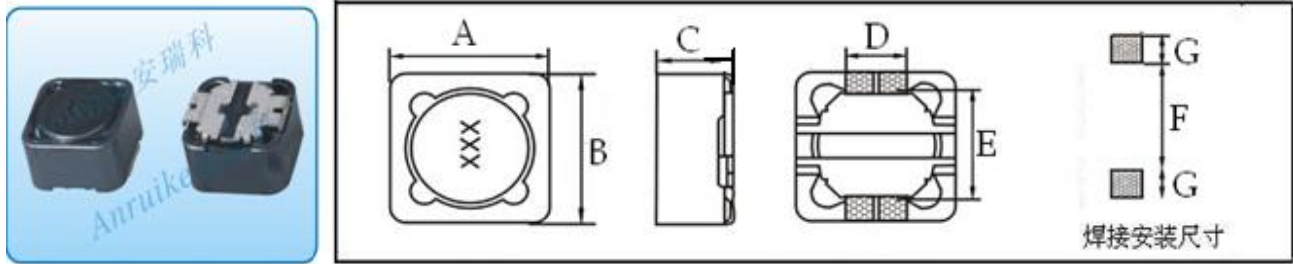

产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH62	6.2	5.9	3.0	1.5	4.6	4.6	1.4	1500PCS/R

电气性能 Electrical properties

Anruike/安瑞科

[www.anruike.com](http://www.anruike.com)

Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH62-6R8N	6.8	±30	100KHz/0.25V	0.11	1.25
CDRH62-8R2N	8.2	±30	100KHz/0.25V	0.13	1.19
CDRH62-100M	10	±20	100KHz/0.25V	0.15	1.10
CDRH62-220M	22	±20	100KHz/0.25V	0.38	0.74
CDRH62-270M	27	±20	100KHz/0.25V	0.45	0.66
CDRH62-330M	33	±20	100KHz/0.25V	0.49	0.59
CDRH62-390M	39	±20	100KHz/0.25V	0.69	0.54
CDRH62-470M	47	±20	100KHz/0.25V	0.78	0.50
CDRH62-560M	56	±20	100KHz/0.25V	1.07	0.46
CDRH62-680M	68	±20	100KHz/0.25V	1.21	0.42
CDRH62-820M	82	±20	100KHz/0.25V	1.39	0.38
CDRH62-101M	100	±20	100KHz/0.25V	1.90	0.34
CDRH62-121M	120	±20	100KHz/0.25V	2.18	0.31
CDRH62-151M	150	±20	100KHz/0.25V	2.77	0.26
CDRH62-181M	180	±20	100KHz/0.25V	3.12	0.23
CDRH62-221M	220	±20	100KHz/0.25V	4.38	0.22
CDRH62-271M	270	±20	100KHz/0.25V	4.94	0.19
CDRH62-331M	330	±20	100KHz/0.25V	5.06	0.17
CDRH62-391M	390	±20	100KHz/0.25V	5.12	0.15
CDRH62-471M	470	±20	100KHz/0.25V	5.20	0.12
CDRH62-561M	560	±20	100KHz/0.25V	5.29	0.10
CDRH62-681M	680	±20	100KHz/0.25V	5.34	0.08
CDRH62-821M	820	±20	100KHz/0.25V	5.41	0.07
CDRH62-102M	1000	±20	100KHz/0.25V	5.50	0.06

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818