
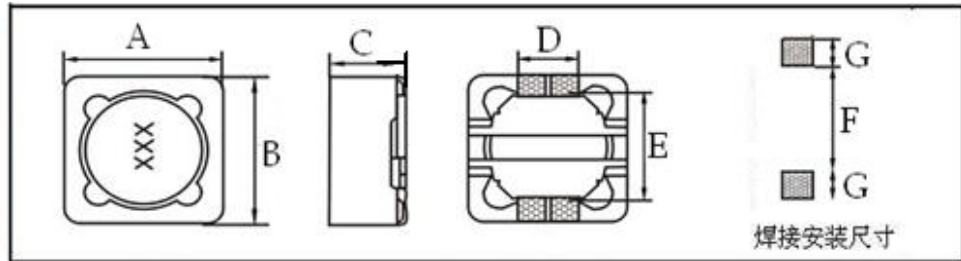


# Anruike 安瑞科/SMD POWER INDUCTORS CDRH64 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH64	6.2	5.9	5.0	1.5	4.6	4.6	1.4	1000PCS/R

电气性能 Electrical properties

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH64-6R8N	6.8	±30	100KHz/0.25V	0.10	1.51
CDRH64-8R2N	8.2	±30	100KHz/0.25V	0.11	1.40
CDRH64-100M	10	±20	100KHz/0.25V	0.12	1.35
CDRH64-120M	12	±20	100KHz/0.25V	0.13	1.22
CDRH64-150M	15	±20	100KHz/0.25V	0.18	1.11
CDRH64-180M	18	±20	100KHz/0.25V	0.24	1.02
CDRH64-220M	22	±20	100KHz/0.25V	0.27	0.91
CDRH64-270M	27	±20	100KHz/0.25V	0.30	0.82
CDRH64-330M	33	±20	100KHz/0.25V	0.33	0.74
CDRH64-390M	39	±20	100KHz/0.25V	0.37	0.69
CDRH64-470M	47	±20	100KHz/0.25V	0.52	0.62
CDRH64-560M	56	±20	100KHz/0.25V	0.56	0.58
CDRH64-680M	68	±20	100KHz/0.25V	0.63	0.51
CDRH64-820M	82	±20	100KHz/0.25V	0.71	0.46
CDRH64-101M	100	±20	100KHz/0.25V	1.03	0.42
CDRH64-181M	180	±20	100KHz/0.25V	1.87	0.32
CDRH64-221M	220	±20	100KHz/0.25V	2.08	0.29
CDRH64-271M	270	±20	100KHz/0.25V	2.37	0.26
CDRH64-331M	330	±20	100KHz/0.25V	2.67	0.23
CDRH64-391M	390	±20	100KHz/0.25V	2.94	0.22
CDRH64-471M	470	±20	100KHz/0.25V	3.39	0.20
CDRH64-561M	560	±20	100KHz/0.25V	5.43	0.18
CDRH64-681M	680	±20	100KHz/0.25V	7.32	0.17
CDRH64-821M	820	±20	100KHz/0.25V	8.24	0.15
CDRH64-102M	1000	±20	100KHz/0.25V	9.26	0.14

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818