
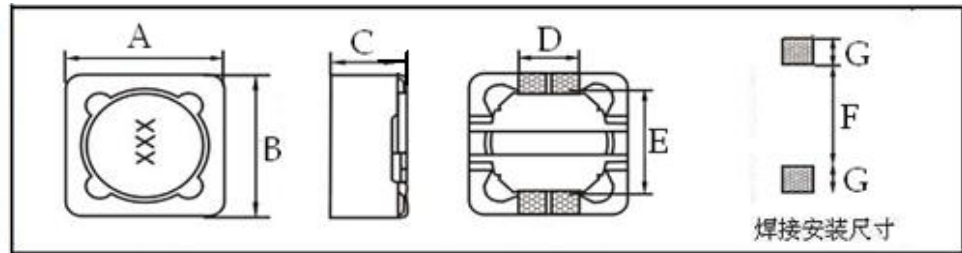


# Anruike/安瑞科 SMD POWER INDUCTORS CDRH73 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH73	7.3	7.3	3.4	1.8	5.0	4.8	1.6	1000PCS/R

电气性能 Electrical properties

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH73-2R2N	2.2	±30	100KHz/0.25V	0.025	5.5
CDRH73-4R7N	4.7	±30	100KHz/0.25V	0.04	3.9
CDRH73-6R8N	6.8	±30	100KHz/0.25V	0.045	3.5
CDRH73-8R2N	8.2	±30	100KHz/0.25V	0.06	3.0
CDRH73-100M	10	±20	100KHz/0.25V	0.07	2.7
CDRH73-120M	12	±20	100KHz/0.25V	0.08	2.4
CDRH73-150M	15	±20	100KHz/0.25V	0.10	2.1
CDRH73-180M	18	±20	100KHz/0.25V	0.12	2.0
CDRH73-220M	22	±20	100KHz/0.25V	0.15	1.8
CDRH73-270M	27	±20	100KHz/0.25V	0.16	1.7
CDRH73-330M	33	±20	100KHz/0.25V	0.17	1.6
CDRH73-390M	39	±20	100KHz/0.25V	0.320	0.77
CDRH73-470M	47	±20	100KHz/0.25V	0.360	0.76
CDRH73-560M	56	±20	100KHz/0.25V	0.37	0.68
CDRH73-680M	68	±20	100KHz/0.25V	0.38	1.05
CDRH73-820M	82	±20	100KHz/0.25V	0.690	0.9
CDRH73-101M	100	±20	100KHz/0.25V	0.790	0.8
CDRH73-181M	180	±20	100KHz/0.25V	1.1	0.6
CDRH73-221M	220	±20	100KHz/0.25V	1.25	0.57
CDRH73-271M	270	±20	100KHz/0.25V	1.5	0.32
CDRH73-331M	330	±20	100KHz/0.25V	1.8	0.28
CDRH73-391M	390	±20	100KHz/0.25V	2.0	0.26
CDRH73-471M	470	±20	100KHz/0.25V	2.3	0.24
CDRH73-561M	560	±20	100KHz/0.25V	3.0	0.22
CDRH73-681M	680	±20	100KHz/0.25V	4.5	0.19
CDRH73-821M	820	±20	100KHz/0.25V	5.3	0.18
CDRH73-102M	1000	±20	100KHz/0.25V	8.0	0.16

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818