
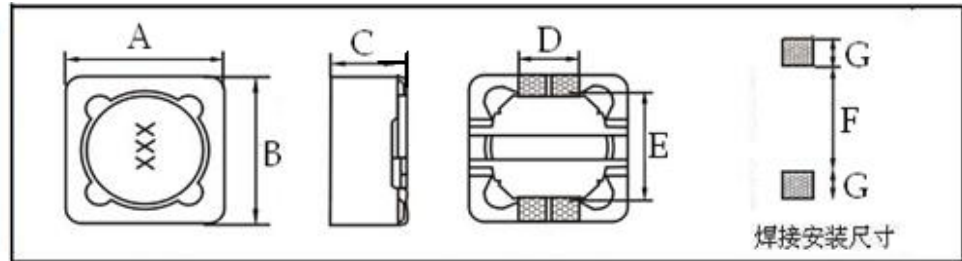


# Anruike 安瑞科/SMD POWER INDUCTORS CDRH74 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A±0.3	B±0.3	C (MAX)	D	E	F	G	载带盘装
CDRH74	7.3	7.3	4.5	1.8	5.0	4.8	1.6	1000PCS/R

电气性能 Electrical properties

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDRH74-4R7N	4.7	±30	100KHz/0.25V	0.027	3.7
CDRH74-8R2N	8.2	±30	100KHz/0.25V	0.04	3.0
CDRH74-100M	10	±20	100KHz/0.25V	0.043	2.8
CDRH74-120M	12	±20	100KHz/0.25V	0.06	2.65
CDRH74-150M	15	±20	100KHz/0.25V	0.065	2.5
CDRH74-180M	18	±20	100KHz/0.25V	0.09	2.36
CDRH74-220M	22	±20	100KHz/0.25V	0.10	2.20
CDRH74-270M	27	±20	100KHz/0.25V	0.11	1.7
CDRH74-330M	33	±20	100KHz/0.25V	0.13	1.50
CDRH74-390M	39	±20	100KHz/0.25V	0.13	1.4
CDRH74-470M	47	±20	100KHz/0.25V	0.18	1.30
CDRH74-560M	56	±20	100KHz/0.25V	0.35	1.20
CDRH74-680M	68	±20	100KHz/0.25V	0.23	1.0
CDRH74-820M	82	±20	100KHz/0.25V	0.43	0.95
CDRH74-101M	100	±20	100KHz/0.25V	0.33	0.8
CDRH74-121M	120	±20	100KHz/0.25V	0.66	0.7
CDRH74-221M	220	±20	100KHz/0.25V	0.75	0.5
CDRH74-271M	270	±20	100KHz/0.25V	0.8	0.45
CDRH74-331M	330	±20	100KHz/0.25V	1.2	0.35
CDRH74-391M	390	±20	100KHz/0.25V	1.3	0.34
CDRH74-471M	470	±20	100KHz/0.25V	1.4	0.33
CDRH74-561M	560	±20	100KHz/0.25V	1.5	0.31
CDRH74-681M	680	±20	100KHz/0.25V	1.63	0.29
CDRH74-821M	820	±20	100KHz/0.25V	3.20	0.27
CDRH74-102M	1000	±20	100KHz/0.25V	3.9	0.25

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX0755-29805221

网址:<http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818