


Anruike 安瑞科/SMD POWER INDUCTORS **CD105** SERIES

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

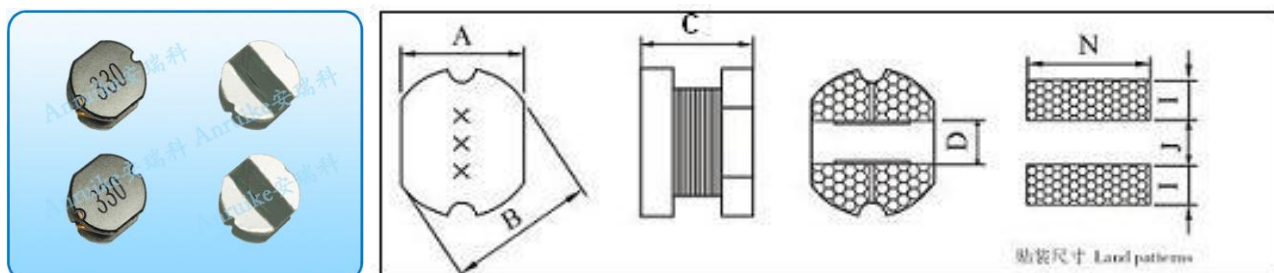

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	1	最小包装数量
CD105	9.0	10.0	5.4	2.9	9.5	4.5	2.5	1000PCS/卷

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD105-8R2M	8.2	±20	100KHz/0.25V	0.05	6.00
CD105-100K	10	±10	100KHz/0.25V	0.025	5.7
CD105-120K	12	±10	100KHz/0.25V	0.03	5.00
CD105-150K	15	±10	100KHz/0.25V	0.037	4.7
CD105-180K	18	±10	100KHz/0.25V	0.04	4.3
CD105-220K	22	±10	100KHz/0.25V	0.055	4.1
CD105-270K	27	±10	100KHz/0.25V	0.06	3.40
CD105-330K	33	±10	100KHz/0.25V	0.07	3.34
CD105-390K	39	±10	100KHz/0.25V	0.08	3.20
CD105-470K	47	±10	100KHz/0.25V	0.1	2.8
CD105-560K	56	±10	100KHz/0.25V	0.10	2.82
CD105-680K	68	±10	100KHz/0.25V	0.12	2.65
CD105-820K	82	±10	100KHz/0.25V	0.15	2.20
CD105-101K	100	±10	100KHz/0.25V	0.20	1.9
CD105-121K	120	±10	100KHz/0.25V	0.30	1.53
CD105-151K	150	±10	100KHz/0.25V	0.37	1.35
CD105-181K	180	±10	100KHz/0.25V	0.40	1.40
CD105-221K	220	±10	100KHz/0.25V	0.42	1.32
CD105-271K	270	±10	100KHz/0.25V	0.63	1.25
CD105-331K	330	±10	100KHz/0.25V	0.95	1.13
CD105-391K	390	±10	100KHz/0.25V	1.00	1.00
CD105-471K	470	±10	100KHz/0.25V	1.08	0.90
CD105-561K	560	±10	100KHz/0.25V	1.10	0.83
CD105-681K	680	±10	100KHz/0.25V	1.28	0.75
CD105-821K	820	±10	100KHz/0.25V	1.55	0.70
CD105-102K	1000	±10	100KHz/0.25V	1.88	0.60

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818