
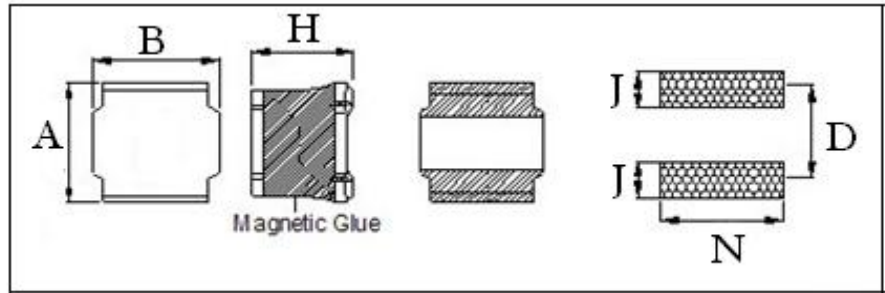


# Anruike 安瑞科/SMD POWER INDUCTORS NR6045 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

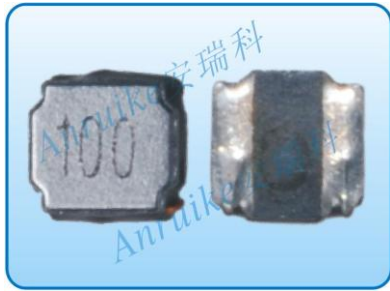

产品型号	A±0.3	B±0.3	H Max	D	N	J	最小包装数量
NR6045	6.0	6.0	4.8	4.7	5.7	1.6	1500PCS/卷

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
NR6045-1R0N	1.0	±30%	100KHz/0.1V	0.0182	4.2
NR6045-1R3N	1.3	±30%	100KHz/0.1V	0.0208	4.0
NR6045-1R8N	1.8	±30%	100KHz/0.1V	0.0234	3.7
NR6045-2R3N	2.3	±30%	100KHz/0.1V	0.0273	3.5
NR6045-3R0N	3.0	±30%	100KHz/0.1V	0.0312	3.2
NR6045-4R5N	4.5	±30%	100KHz/0.1V	0.0403	3.0
NR6045-6R3N	6.3	±30%	100KHz/0.1V	0.0494	2.8
NR6045-100M	10	±20%	100KHz/0.1V	0.0611	2.5
NR6045-150M	15	±20%	100KHz/0.1V	0.1001	1.9
NR6045-220M	22	±20%	100KHz/0.1V	0.1495	1.5
NR6045-330M	33	±20%	100KHz/0.1V	0.1885	1.4
NR6045-470M	47	±20%	100KHz/0.1V	0.266	1.1
NR6045-680M	68	±20%	100KHz/0.1V	0.429	0.9
NR6045-101M	100	±20%	100KHz/0.1V	0.650	0.7
NR6045-121M	120	±20%	100KHz/0.1V	0.628	0.6

以上为常用参数,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司。

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ:1193940818